

The automatic sorting using image processing improves postharvest blueberries storage quality

Gabriel Leiva^a, Germán Mondragón^b, Domingo Mery^b, José Miguel Aguilera^a

^a Department of Chemical and Bioprocess Engineering, Pontifical Catholic University of Chile, Santiago, Chile (gmlleiva@uc.cl)

^b Group of images, Department of Computer Science, Pontifical Catholic University of Chile, Chile, (gmondrag@uc.cl)

ABSTRACT

South American blueberry fruit production has been increasing over than 40% the late decade moved for international demand leading for United States of America. However, during storage and transportation stage, fungal decay may cause serious damage in batch which causes rejects and low prices in destinations. Moreover, traditional manual methods to remove diseased unities of blueberry after harvest are slow, unconfident and expensive. In this work, we propose a simple and non expensive method to be implemented to remove unities with fungal damage. It consists in computer vision algorithms to extract and select information from blueberries and implement the best classifier to segregate automatically unities with fungal decay, shrivelling and mechanical damage from health unities. It was possible classify correctly over than 96% images with fungal decay and more the 90% of blueberries with global damage (fungal decay, shrivelling or mechanic damage). The implementation of automatic computer vision systems to recognize defects in blueberries is complex due to blueberries morphology, obscure colour, little size, wax presence. It results are promissory since will allows increase export quality when will be implemented in production lines.

Keywords: blueberry; berry; computer vision; automatic quality control; postharvest disease; physiological disorder.

INTRODUCTION

Fresh blueberry (*Vaccinium corymbosum*) needs more than thirty days between harvest in south hemisphere and commercialization in north hemisphere. During this time, serious damages may occur if diseased fruit were not removed immediately after harvest. In spite of manual classifying is done by operators, human sight do not detect all damaged fruit, increasing the risk of lose batch by develop of fungal decay and mechanical damage. A good method for sort blueberries in commercial classes is essential to ensure a desirable quality of exported fruit.

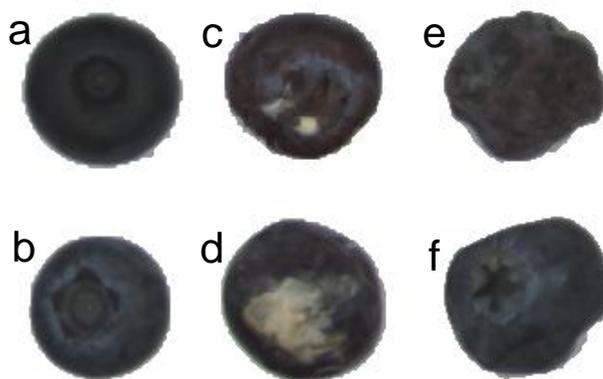


Figure 1. Diseased blueberries during postharvest should be segregated. a) and b) health blueberry in pedicel and calyx side; c) and d) decayed berries; e) shriveling blueberry; f) mechanical damage.

Computer vision is a non destructive, low operational cost, confidence, objective and efficient technology based in image processing. A digital image is the interpretation of one or more numerical matrix, where interest object (like blueberry) present numeric affinities that represent colours or gray intensity zones inside

image which may be operated with algebraic principles to detect different characteristics of the fruit. In this sense, we have been developing strategies for analyze and design applications of quality control in foods using image processing and pattern recognition techniques which are more confident, safe and quick than human sight [1]. Computer vision stages includes: image pre-processing and pattern recognition. Image processing include all algebraic operations over matrixes to improve signal to noise ratio. Operations include filtering [2] and segmentation to discard non relevant elements and accent important others inside an image [3]. A robust algorithm must be implemented for segment food colour images using threshold and morphological operations. Pattern recognition study how machines may “watch” the environment, to learning pattern of interest and to take decisions over a new object watched that wedge in a category. A pattern is represented for a group of geometric and chromatic features able to define one o more classes. The first step consist in extract with appropriate algorithms the most features from category-known images as possible are [4] after that, features must be selected by its capacity of separate correctly the classes. It step is part of “training” mode allowing at the system to be prepared when a new unknown image enter to be automatically classify in the step of “test” [5]. Classification is done for statistic or clustering algorithms which define what object correspond at one or other class. A complete information about statistical pattern recognition might be reviewed in work of Jain [5], Duda [6], Bishop [7], and Holmström and Koistinen [8].

Computer vision in postharvest disease detection allows classify fruit unities in different quality degrees. There are different published information in different kind of fruit like olive [9], apple [10-13] and bayberry [14]. Complete review of non destructive technology in fruit postharvest was done by [15] and [16]. However, computer vision in sorting lines in blueberries is still not published. One of the mean reasons is that common fruit present more visual feasibility to detect defects than blueberry which is smaller, darker and has a white wax film in surface. Knowing the damage patterns that define different kinds of berries as quality levels can be designed automatic classification algorithms to be implemented in the industry, reducing overall batch rejections for damage in transport.

The aim of this study was to design a methodology to classify blueberries with fungal decay, shrivelling and mechanical damage using statistical pattern recognition techniques: extracting the most possible features, selecting the best ones, training the best classification algorithm.

MATERIALS & METHODS

Row material and equipment. “Highbush” blueberries, (*Vaccinium corymbosum* var. Star) were acquired from cultivars in central region of Chile. Before experimentation, blueberries were stored in refrigerated camera at 0° C for 8 weeks to induce different levels of postharvest damages. 30 unities of blueberries were analyzed for each class (a total of 150 unities). Image acquisition was done under standard conditions of scene in a colorimeter DVS-lab colorimeter (Digital Vision Solutions www.divisol.cl). Each fruit was imaged (480 x 640 pixels each color image) in calyx zone and pedicel zone (one image per zone) to study disease localization predominance (Figure 1) . Different quality classes were defined by agronomist specialized in berries diseases, these classes were used to train the algorithms and test the classifier. All data were processed and analyzed using Matlab™ (Mathworks corp.).

Image segmentation: Otsu thresholding and morphologic operations were used to segment each high contrast grayscale image generated from RGB [3]. Four steps of statistical recognition algorithms were used to sort three level-quality of non-classify images of blueberries following [5] recommendations: Geometric and chromatic features extraction: different algorithms extracted 1643 geometric and chromatic features in RGB, HSV, l*, a*, b* and intensity color spaces from each image, the extracted features includes image textures, “Gabor features”, “Fourier” [17] and “Discrete Cosine Transformates” [4]. Table 1 present a list of features selected in this study. The features were extracted using “Balú” free use toolbox for recognition patterns (<http://dmery.ing.puc.cl/index.php/balu/>). Features selection using strategies: The key idea of the feature selection is to select a minor subset of features from total features that leads to the smallest classification error. It was done using 8 combined strategies. The best strategy should optimize a reduce amount of features with the maximal classification hits. The strategies used were “*Sequential forward Selection*” (SFS), with objective functions: “Fisher discriminant”, k-nearest neighbour (KNN), “linear and quadratic discriminant analysis” (LDA and QDA); and other feature extractors without objective function: *Forward orthogonal search algorithm by maximizing the overall dependency* (FOSMOD), *Least squares ellipse fitting* (LSEF) and *Rank key features by class separability criteria* RANKFS. A complete description of these algorithms may be read in [5]. Classifiers design: with the selected features, decision lines, planes or hyper planes was implemented using LDA, QDA, minimal distance (MIN. D), Mahalanobis distance (MD), KNN (with 4 to

30 nearest neighbours), Support Vector Machine (SVM) and different Neural Networks techniques (NN). The classifiers statistic validation: was implemented using stratified cross-validation which yields a confidence interval each classification with 95% confidence.

RESULTS & DISCUSSION

Extracting and selecting better features

Total features were reduced from 1643 to only 7 - 11 using a combined strategy between an extractor of better features and a classifier. SFS - Fisher strategy was better than others like SFS-LDA, SFS-KNN, RANKFS and FOSMOD. These optimal amounts of features involve faster applications in process sorting line shorting computation time in applications used in computer vision like mobile recognition and quantification of wild blueberry for a mobile acquisition system [18] where is important to obtain a real time response. In general, image features presented in Table 1 give information about pixel homogeneity and differences of shape between classes: blueberry fruits with less presence of disease are mores homogenous than fruit with high level of disease, then should exhibit minor values of these features. Differences between shapes of blueberries might be produced for diseases like mechanical damage and should be represented in features like Danielsson algorithm, Hu moments and Fourier descriptors between others.

Table 1 Selected features to recognize fungal decay in blueberries.

Generic Feature and nomenclature description	Features found as pattern of blueberry disease	side
Haralick texture (Tx), “k”esime entropy calculated with “n” pixels, of distance (range or mean) measure in color components H, S, V, R, G or B [14]	Tx2,d1(mean)-H, Tx1,d1(mean)-H, Tx2,d1(mean)-G, Tx8,d1(mean)-R, Tx14,d1(range)-R, Tx5,d1(mean)-S,	Pedicel-calyx Calyx Pedicel Calyx Calyx Calyx
Eccentricity (E) is the distance between the eccentric center and its axis [15].	E	Calyx
Euclidian distance measured with Danniellsson algorithm [18].	EDD	Calyx
Hu invariant moment (Hu), -number (N) [16].	Hu-3	Pedicel, calyx
Hu invariant moment (Hu), number (N), measured in intensity image (int) in saturated image	Hu-3-int	Pedicel
Gabor (Ga) - component (n,m), measure in color components (H,S,V,R,G,B or gray) [17].	Ga(1,3)-gray Gabor(J)-H	Pedicel-calyx Calyx
Fourier transform (Fu)-“k”esime descriptor measured in color components (H,S,V,R,G,B, saturation or gray) [13]	Fu-10-gray Fu-3-sat	Pedicel Calyx
Average gray intensity of image (G)	G	Calyx
Discrete Cosin Transform (DCT) with “n” point measures in color components (H,S,V,R,G,B, saturation or gray) [13]	DCT-4-gray	Pedicel
Center of ellipse	CE	Calyx

Selecting the best strategy with the appropriate number of features

Using a brief amount of features with the two best classifiers: “LDA” and “NN” was possible classify correctly over than 96% images with fungal decay (Figure 2). Using “SVM”, “LDA” and “QDA” was

possible design classifiers to segregate more the 90% of blueberries with global damage (fungal decay plus shriveling plus mechanic damage compared with healthy unities).

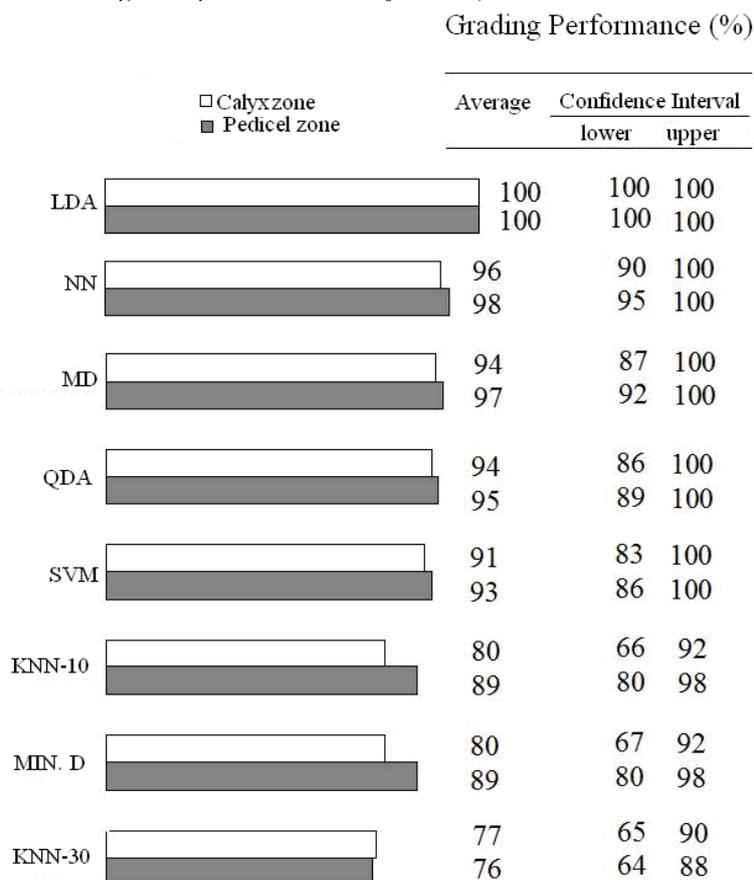


Figure 2. Grading performance with different classifiers of fungal decay

Actually, operators remove diseases as fungal decay, mechanical damage and shriveling. However, this process is slow and expensive. Blueberry fruits have several characteristics that make difficult the quality inspection through computer vision techniques: is smaller than common fruit as apple or pears; high variability of shapes, weights, colors; dark color and wax presence that block an appropriate vision of defects. In this sense, the work presented has the goal to be the first approach to develop a system able to be implemented in an automatic process line, or to be a tool that complements actual systems to control manual labors. Further work should include evaluate other visual damages and others non visual as softening. The best technology might be implemented with spectral imaging and image processing with similar algorithms that this approach.

The proposed methodology to find the better few features, the best classifiers might be slow in a first. However, once known the selected algorithms, the selection is done in real time. Is interesting to notice that better classifier was LDA, the simplest algorithm. Other good results were done with other algorithms as a neuronal network or support vector machine, both slower in calculus time.

CONCLUSION

Using these eight features with the two best classifiers: “LDA” and “NN” was possible classify correctly over than 96% images with fungal decay. Using “SVM”, “LDA” and “QDA” was possible design classifiers to segregate more the 90% of blueberries with global damage (fungal decay, shrivelling or mechanic damage). This methodology was capable to classify between 90 and 100% of damaged blueberries using computer vision, in spite of blueberries is a difficult fruit to detect postharvest diseases, ten percent more than common manually sorting. The present study is the first approach to diminishing operations cost and rejections of blueberries batches in destine using computer vision techniques.

ACKNOWLEDGES

The study was supported by scholarship CONICYT (National Commission for Scientific and Technological Research) from Chile.

REFERENCES

- [1] J. M. Aguilera, "Computer vision and food quality," *Food Australia*, vol. 57, pp. 79-87, 2005.
- [2] M. T. Ibrahim, T. Bashir, and L. Guan, "Robust Fingerprint Image Enhancement: An Improvement to Directional Analysis of Fingerprint Image Using Directional Gaussian Filtering and Non-sampled Contourlet Transform," in *Multimedia*, 2008. ISM 2008. Tenth IEEE International Symposium on, 2008, pp. 280-285.
- [3] D. Mery and F. Pedreschi, "Segmentation of colour food images using a robust algorithm," *Journal of Food Engineering*, vol. 66, pp. 353-360, 2005.
- [4] D. Mery and A. Soto, "Features: the more the better," in *Proceedings of the 8th conference on Signal processing, computational geometry and artificial vision Rhodes, Greece: World Scientific and Engineering Academy and Society (WSEAS)*, 2008.
- [5] A. K. Jain, R. P. W. Duin, and M. Jianchang, "Statistical pattern recognition: a review," *Pattern Analysis and Machine Intelligence, IEEE Transactions on*, vol. 22, pp. 4-37, 2000.
- [6] R. O. Duda, P. E. Hart, and D. G. Stork, *Pattern classification 2nd ed ed*. New York: John Wiley and Sons, 2001.
- [7] C. Bishop, *Pattern Recognition and Machine Learning (Information Science and Statistics)*: Springer, 2007.
- [8] L. Holmström and P. Koistinen, "Pattern recognition," *Wiley Interdisciplinary Reviews: Computational Statistics*, vol. 9999, p. n/a, 2010.
- [9] M. T. Riquelme, P. Barreiro, M. Ruiz-Altisent, and C. Valero, "Olive classification according to external damage using image analysis," *Journal of Food Engineering*, vol. 87, pp. 371-379, 2008.
- [10] N. De Belie, K. Tu, P. Jancsó, and J. De Baerdemaeker, "Preliminary study on the influence of turgor pressure on body reflectance of red laser light as a ripeness indicator for apples," *Postharvest Biology and Technology*, vol. 16, pp. 279-284, 1999.
- [11] D. Unay and B. Gosselin, "Automatic defect segmentation of 'Jonagold' apples on multi-spectral images: A comparative study," *Postharvest Biology and Technology*, vol. 42, pp. 271-279, 2006.
- [12] J. Xing, V. Van Linden, M. Vanzebroeck, and J. De Baerdemaeker, "Bruise detection on Jonagold apples by visible and near-infrared spectroscopy," *Food Control*, vol. 16, pp. 357-361, 2005.
- [13] J. A. Throop, D. J. Aneshansley, W. C. Anger, and D. L. Peterson, "Quality evaluation of apples based on surface defects: development of an automated inspection system," *Postharvest Biology and Technology*, vol. 36, pp. 281-290, 2005.
- [14] W. Zhang, K. Chen, B. Zhang, C. Sun, C. Cai, C. Zhou, W. Xu, W. Zhang, and I. B. Ferguson, "Postharvest responses of Chinese bayberry fruit," *Postharvest Biology and Technology*, vol. 37, pp. 241-251, 2005.
- [15] C. J. Studman, "Computers and electronics in postharvest technology -- a review," *Computers and Electronics in Agriculture*, vol. 30, pp. 109-124, 2001.
- [16] T. Brosnan and D.-W. Sun, "Improving quality inspection of food products by computer vision--a review," *Journal of Food Engineering*, vol. 61, pp. 3-16, 2004.
- [17] E. Persoon and K. S. Fu, "Shape discrimination using Fourier descriptors," *IEEE Trans. Systems, Man, and Cybernetics, SMC*, vol. 7, pp. 170-179, 1977.
- [18] K. C. Swain, Q. U. Zaman, A. W. Schumann, D. C. Percival, and D. D. Bochtis, "Computer vision system for wild blueberry fruit yield mapping," *Biosystems Engineering*, vol. 106, pp. 389-394, 2010.